


HINGED SLAT CHAIN CONVEYOR

The sturdy conveyor




- Designed for conveying sharp-edged parts or transport containers, pallet cages, etc.
- High conveying speeds
- Large point loads possible on the chain

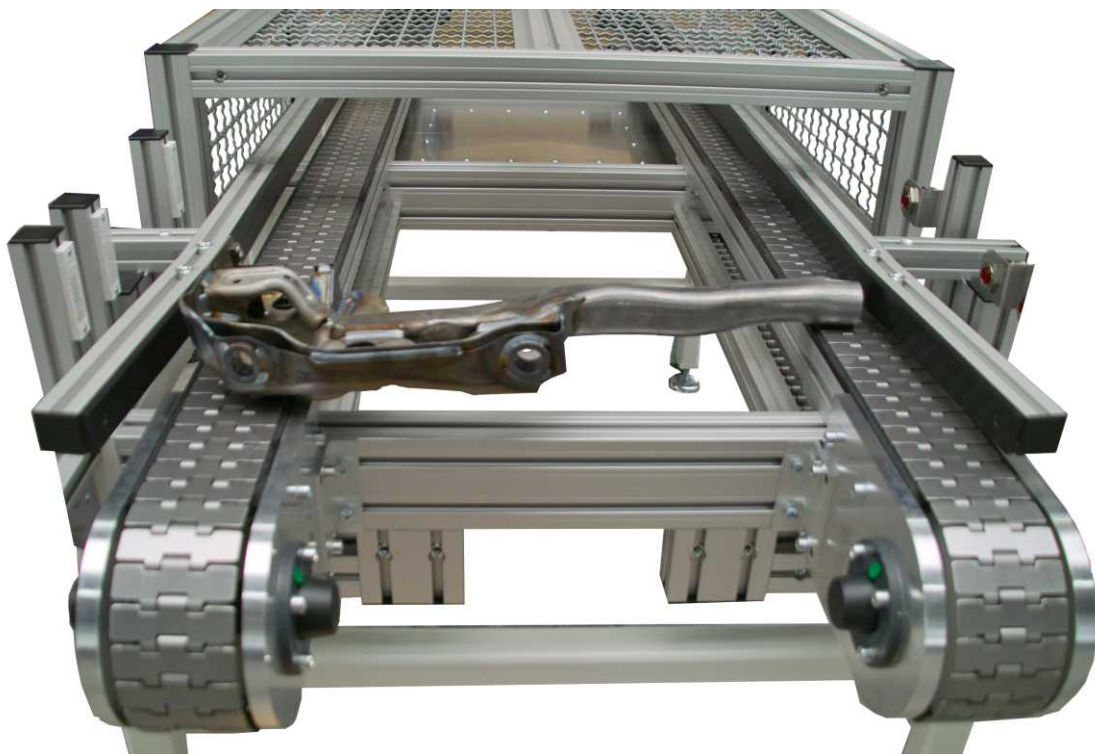

Product features:

Hinged slat chains are distinguished by a large contact area on the chain guidance system. This ensures a high point-load handling capacity for the material to be conveyed.

When using hardened chains, hinged slat chain conveyors are especially well suited for conveying particularly wear-sensitive parts (cast parts, welded components, gear wheels, glass bottles, etc.).

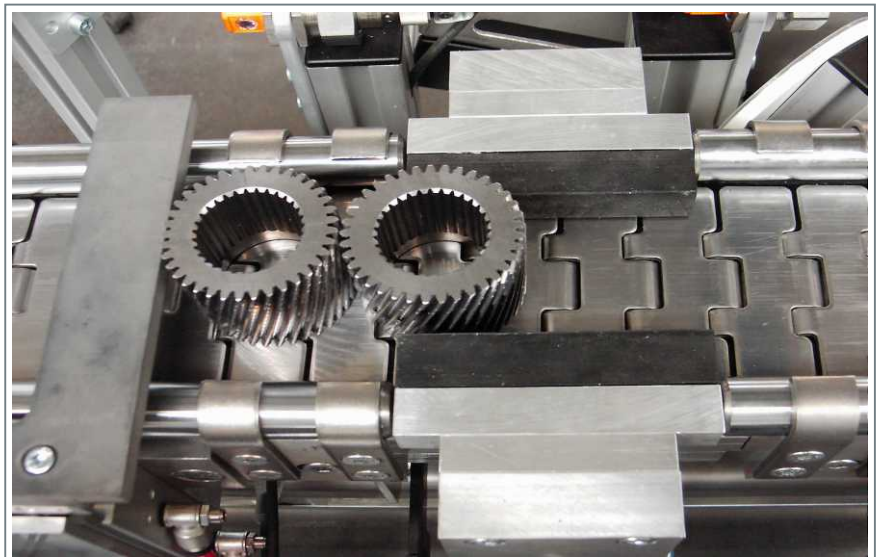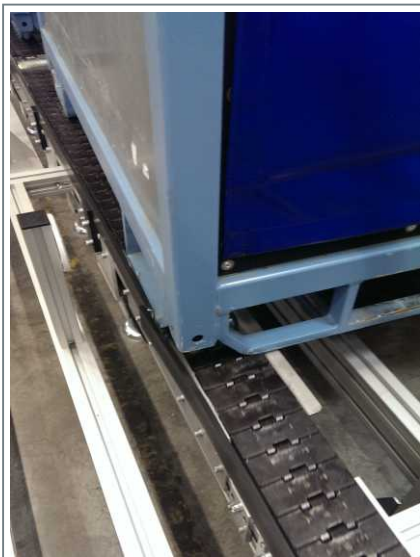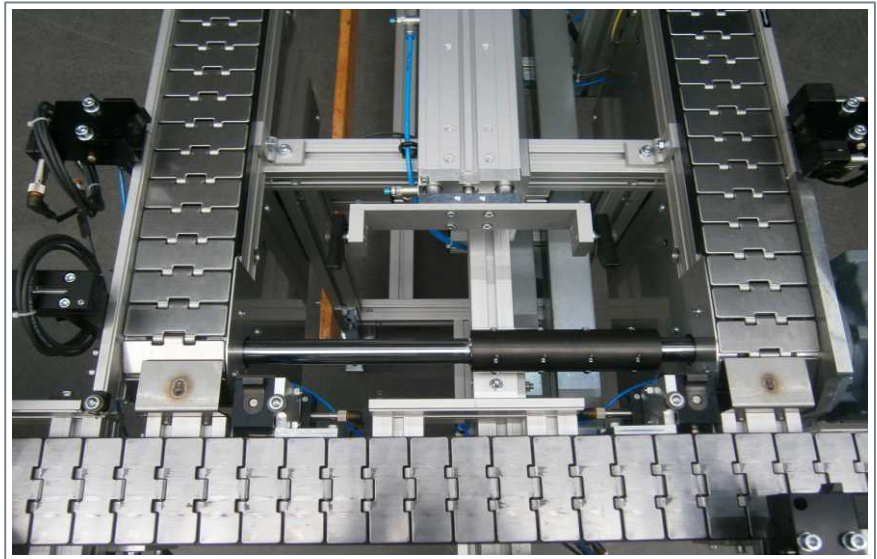

Technical specifications:

Transport media:

Conveying speeds:

Workpiece carrier dimensions:

WP carrier weight including workpiece:

WP carrier switchover times:

Hinged slat chains made of steel or stainless steel,
width 101,6 mm

up to max. 80 m/min

180 x 180 ... 3 000 x 3 000 mm (other sizes available on request)

up to max. 500 kg

> 2 sec. (depending on workpiece carrier dimension and weight)

ALTRATEC Automation GmbH

Stuttgart Plant

Herrenwiesenweg 22

71701 Schwieberdingen

GERMANY

Ph. +49 7150 3506-0

Fax. +49 7150 3506-29

www.altratec.de · info@altratec.de

ALTRATEC Automation GmbH

Chemnitz Plant

Südstraße 9

09221 Neukirchen

GERMANY

Ph. +49 371 28134-0

Fax. +49 371 28134-34

www.altratec.de · info@altratec.de

China Plant

Bachtel Ltd.

Suzhou New District, Suzhou City,

Jiangsu Province

China, PC. 215151

Ph. +86 512 65 36 00 65

Fax. +86 512 65 36 09 06

Certified according to DIN EN ISO