

TIMING BELT CONVEYOR

The flexible conveyor


- Wide variety of coatings of conveyor belt
- Large followers even at high speeds
- Precise timing thanks to slip-free drive



Transport media:	Synchronous belt (endless, with steel reinforcement) different coatings possible, different belt widths (standard 25/30 mm)
Conveying speeds:	0.2 ... 80 m/min
Workpiece carrier dimensions:	180 x 180 ... 2 000 x 2 000 mm
Workpiece carrier weight incl. workpiece:	up to approx. 60 kg
Maximum load per drive (no accumulation mode):	up to approx. 300 kg



Sample systems

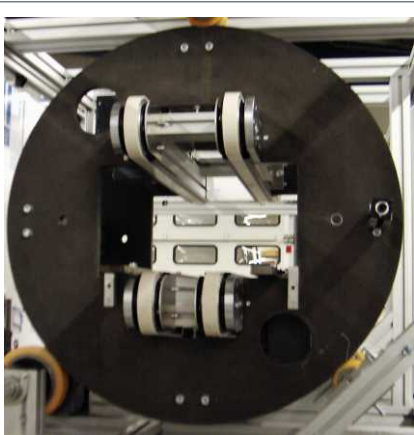


Turnaround unit for cast



Buffering system Door frames



Timing belt conveyor as lift/transverse unit in a roller conveyor system

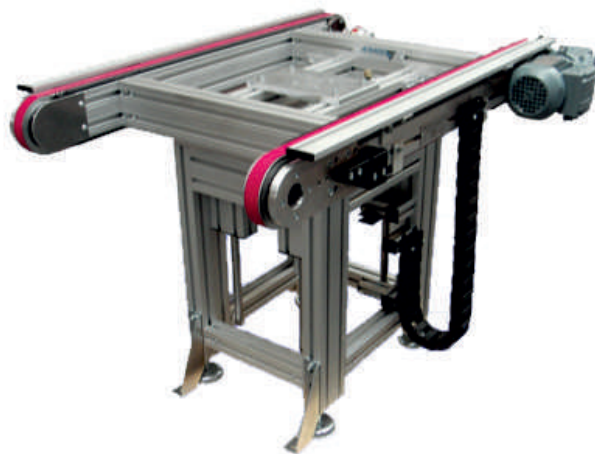

Interlinking and buffering system Foaming system Door seals



Interlinking Soldering furnace for oil coolers, WP carrier return



Interlinking Shell construction assembly "Sheet metal part supply for tailgate"

ALTRATEC Automation GmbH

Stuttgart Plant
Herrenwiesenweg 22
71701 Schwieberdingen
GERMANY
Ph. +49 7150 3506-0
Fax. +49 7150 3506-29
www.altratec.de · info@altratec.de

ALTRATEC Automation GmbH

Chemnitz Plant
Südstraße 9
09221 Neukirchen
GERMANY
Ph. +49 371 28134-0
Fax. +49 371 28134-34
www.altratec.de · info@altratec.de

China Plant

Bachtel Ltd.
Suzhou New District, Suzhou City,
Jiangsu Province
China, PC. 215151
Ph. +86 512 65 36 00 65
Fax. +86 512 65 36 09 06

Certified according to DIN EN ISO 9001:2008